

## UV 250W Flood Lamp




Feature:

- High UV-A light intensity
- Wide beam spread
- 135 V to UV lamp for added electrical safety
- Elapsed hour counter for service scheduling
- Fan cooled
- 230 V or 115 V / 50 Hz
- 60 Hz options available

UV light spectral output

UV light spectral output within the wavelength range 315 nm - 400 nm.

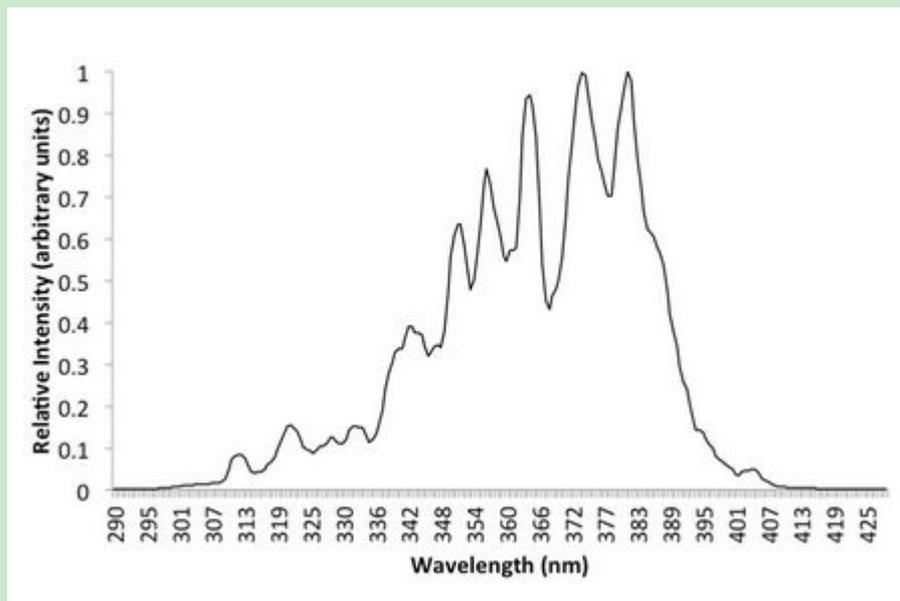

UV bulb	250 W high intensity discharge Iron (Fe) doped metal halide (ozone free)
UV bulb operating life	Approximately 500 hours depending on age, environment, switching and cooling
UV filter glass	Black (woods glass) - 140 mm x 85 mm x 3 mm
Reflector material	Aluminium - UVL full spectrum grade
Power supply	230 V or 115 V / 50 Hz (60 Hz options available)
Power	260 W
Noise	< 70 dB
Rating	IP 40
Integral fuse protection	2 x 4 A miniature time lag fuses - ceramic body 5 mm x 20 mm
Thermal protection	Auto reset thermal cutout
Construction material	Sheet aluminium
Coating material	UV stable black polyester powder
Connecting cable length	3 m (extensions available)
Weight of UV lamp	1.5 Kg (approximately)