


1200 Series

PC Board Mountable Pressure Sensor
 Temperature Compensated
 0 – 100mV Output
 Gage, Absolute, Differential
 Current/Voltage Excitation

1200 Series

The 1200 series is a temperature compensated, piezoresistive silicon pressure sensor packaged in a dual-in-line configuration.

Integral temperature compensation is provided over a wide temperature range using laser-trimmed resistors. An additional laser-trimmed resistor is included to normalize pressure sensitivity variations by programming the gain of an external differential amplifier.

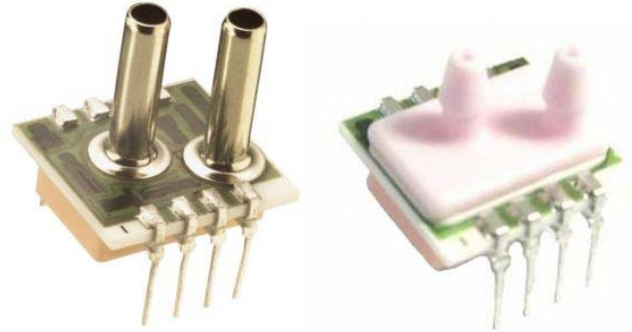

FEATURES

- Dual-in-Line Package
- 1.0% Interchangeable Span (provided by gain set resistor)
- Solid State Reliability
- Wide Compensated Temperature Range

APPLICATIONS

- Medical Instruments
- Airspeed and Altitude Measurements
- Process Control
- Factory Automation
- Vacuum Measurement
- Handheld Calibrators
- Leak Detection
- Sleep Apnea
- Respirators/Ventilators
- Air Duct Flow

1200 Series

Product Definition

Model	Pressure Ranges	Type (G = Gage A = Absolute D = Differential)	Span	Supply Voltage	Current	Compensated Temperature	Unique Feature
1210 Sub psi	0 - 5, 10" in H ₂ O	G, D	40mV		1.5mA	0°C to 60°C	Barbed port option Current excitation
1210 1psi	0 - 1psi	G, D	100mV		1.5mA	0°C to 50°C	Barbed port option Current excitation
1210 Standard	0 - 2, 5, 15, 30, 50, 100psi	G, A, D	100mV		1.5mA	0°C to 50°C	Barbed port option Current excitation
1220 1psi	0 - 1psi	G, D	50mV	1.235Vref		0°C to 50°C	Voltage excitation
1220 Standard	0 - 2, 5, 15, 30, 50, 100psi	G, A, D	50mV	1.235Vref		0°C to 50°C	Voltage excitation
1230 UltraStable™	0 - 15, 30, 50, 100psi	G, A, D	100mV		1.5mA	-20°C to +85°C	Current excitation UltraStable™
1240 UltraStable™	0 - 15, 30, 50, 100psi	G, A, D	50mV	1.235Vref		-20°C to +85°C	Voltage excitation UltraStable™

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.