# **Piezoelectric Film Sensors**

Pro-Wave now presents a series of mechnoelectrical sensors and detectors produced by advanced piezoelectric polymer film technology. The polymer film of polyvinylidene fluoride (PVF2) exhibits a conspicuous piezoelectric effect and also has high compliance comparing with other piezoelectric crystals or ceramic materials. Because of its superior piezoelectric strain constant (g value), 10-20 times larger than piezoelectric ceramic, it is an ideal sensing material for converting mechanical to electrical energy.


Besides the standard products shown on this catalogue, we are also developing a series of sensing devices by using this particular piezoelectric thin film material. Please contact with us for your special needs.

### Features


- High Mechno-electrical coefficiency in planar, thickness and hydrostatic modes
- Low mechanical and acoustic impedance
- High resistance to moisture
- Pliant, flexible, tough and lightweight
- Self-generated voltage, non-contact, rustless, free of sparking


### **Applications**

- Vibration sensors and motion detectors
- Low weight accelerometers
- Pressure or force sensors
- Keyboards, keypads and touch panels
- Coin and impact sensors
- Microphones and headset speakers
- Other mechno-electrical and electromechanical devices



#### **Frequency response**






SG: Programmable Signal Source HP 8165A Amp: Power Amplifier Exciter: Exciter B&K 4809 Acc: Accelerometer B&K 8309 DUT: Device (FS-2513P) under test CA: Charging Amplifier B&K 2635 IA: Impedance Analyzer HP4192

# **Piezoelectric Film Sensors**

### **Specifications**


Model Number	FS-2513P	Unit
Туре	Lead Pins	-
Voltage sensitivity at fr	70	$mV/ms^{-2}$
Transverse sensitivity	10	$mV/ms^{-2}$
Resonant frequency (fr)	80±10	Hz
Capacitance	660±30%	pF@1KHz
Operation voltage (Vcc)	-	DC volts
Operation current	-	mA
Max. output current	-	mA
Operation temperature	-20 - +60	°C
Storage temperature	-40 - +70	°C

### **Dimensions** in mm

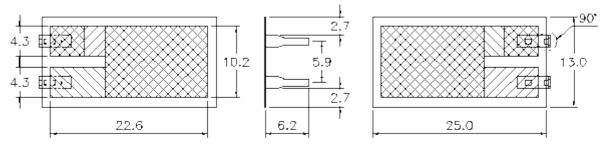

# Driving circuit & pin assignment of model FD-2513P

All copyrights reserved 1994, 1998 Pro-Wave Electronics Corporation

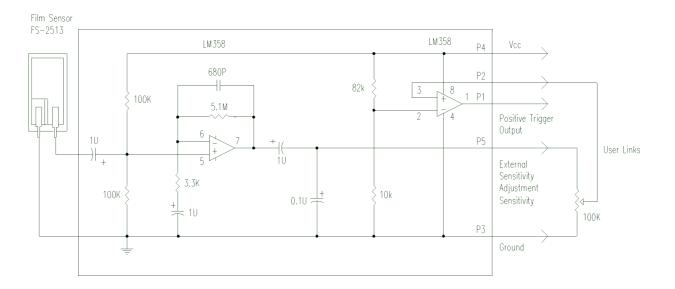

**İSweek** www.isweek.cn 公司名:深圳市工采网络科技有限公司 电话:+ 86-755-83289069

地址: 广东省深圳市南山区高新南一道中国科技开发院3号楼16层 传真: + 86-755-83289052 邮箱: sales@isweek.cn