



**XiangHua ELECTRONICS CORP.**

Total solution partner for EMI,Power and RF

## SPECIFICATION FOR APPROVAL

**Customer :**

**Supplier :** 沅陵县向华电子科技有限公司

**Productors :** Molding power inductors

**Customer P/N :** HBE252012A-系列

**Xianghua P/N :** HBE252012A-系列

**Issued Date :** 2023/8/23

### Customer Response

<b>Approved By:</b>	<b>Signature:</b>	<b>Date:</b>

### Xianghua Signature

<b>Prepared By</b>	<b>Checked By</b>	<b>Approved By</b>
<i>mei. li</i>		<i>haixia. song</i>

ISO 9001  
ISO14001  
IATF16949

yuanling Town, Huaihua City, Hu nan, China 528322

Tel: (0745) 2168666 Fax: (0745) 2599662

Email: mary.song@xianghuadz.com Website: <http://www.xianghuadz.com/>






**XiangHua ELECTRONICS CORP.**  
Total solution partner for EMI, Power and RF

Customer : \_\_\_\_\_ Date : 2023/8/23  
 Customer P/N : \_\_\_\_\_ Rev No. : A  
 Xianghua P/N : HBE252012A-系列

Rev	Items	Before	After	Owner	Date
A	—	—	—	haixia.song	2023/8/23






**SPECIFICATION FOR APPROVAL**

Customer : ..... Date : **2023/8/23**  
 Customer P/N: ..... Rev No. : **A**  
 Xianghua P/N: **HBE252012A-系列**

**1.MECHANICAL & DIMENSIONS**

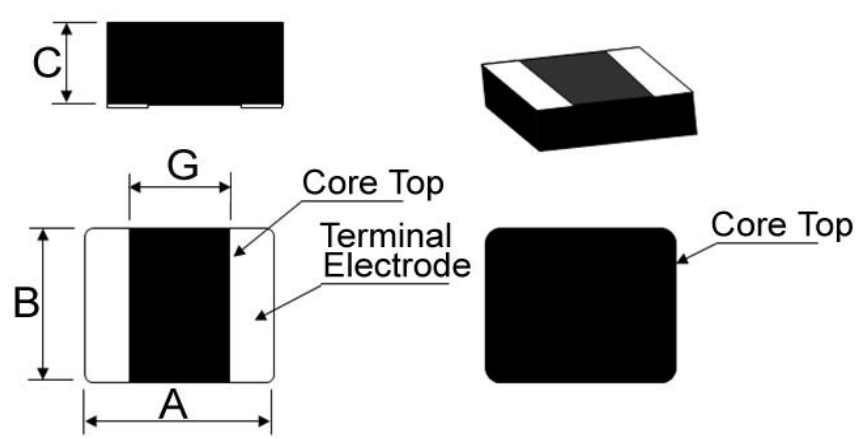

(UNIT: mm)	
A	2.5±0.2
B	2.0±0.2
C	1.2Max
G	0.7±0.2

**REMARK**  
NO Marking

**TEST INSTRUMENTS**  
4287A  
TH2512A  
6375+6220

**2.TEMPERATURE RATING:**

Operating	-55°C ~ +125°C (Including self-temperature rise)
-----------	--

**3.PRODUCT IDENTIFICATION:**

**HBE 252012 A- 1R0 M**

**A B C D E**


A: Product Series.

B: Series number, part size

C: Edition

D: Inductance

E: Inductance Tolerance. (K±10% M±20% T±30%)



PREPARED BY	CHECKED BY	APPROVED BY
<i>mei.li</i>		<i>haixia.song</i>



**4.ELECTRICAL REQUIREMENTS:**

NO	Part Number	Inductance	DC Resistance		Isat(A)		Irms(A)		Marking
		1MHz/0.1V	Max.	Typ.	Max.	Typ.	Max.	Typ.	
	Units	(uH)	mΩ	mΩ	A	A	A	A	
1	HBE252012A-R10M	0.1±20%	10	6	12.6	13.5	10.7	12.5	N/A
2	HBE252012A-R15M	0.15±20%	11	7	12.2	13.1	10.2	11.7	N/A
3	HBE252012A-R22M	0.22±20%	14	9	9.2	9.8	7.7	8.3	N/A
4	HBE252012A-R24M	0.24±20%	15	10	8.9	9.4	7.6	8.1	N/A
5	HBE252012A-R33M	0.33±20%	17	11	7.9	8.4	6.5	6.9	N/A
6	HBE252012A-R47M	0.47±20%	19	13	7.1	7.6	6.2	6.7	N/A
7	HBE252012A-R68M	0.68±20%	23	17	6.2	6.6	5.6	6.4	N/A
8	HBE252012A-1R0M	1.0±20%	42	35	5.1	5.7	3.7	4.0	N/A
9	HBE252012A-1R5M	1.5±20%	50	44	4.2	4.6	3.3	3.8	N/A
10	HBE252012A-2R2M	2.2±20%	65	55	3.4	3.8	2.8	3.0	N/A
11	HBE252012A-3R3M	3.3±20%	97	80	2.8	3.1	1.9	2.4	N/A
12	HBE252012A-4R7M	4.7±20%	170	150	2.2	2.5	1.6	1.8	N/A
13	HBE252012A-6R8M	6.8±20%	270	245	1.8	2.1	1.5	1.7	N/A
14	HBE252012A-100M	10±20%	400	330	1.5	1.6	1.1	1.2	N/A

**Test remarks**


- All test data is referenced to 25 °C ambient.
- Test Condition:1MHz, 1.0Vrms.
- Irms:DC current (A) that will cause an approximate T of 40 .
- Isat:DC current (A) that will cause L0 to drop approximately 30%.
- Operating Temperature Range -55 to + 125 .
- The part temperature (ambient + temp rise) should not exceed 125 under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.
- The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- Absolute maximum voltage 15VDC.



**XiangHua ELECTRONICS CORP.**

Total solution partner for EMI, Power and RF


**PACKAGING**

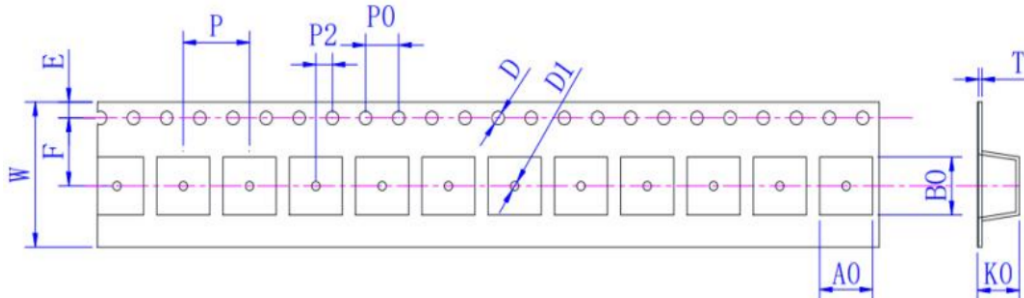

Series	W ±0.30	A0 ±0.05	B0 +0.1/-0	D +0.1/-0	D1 Min	E ±0.10	F ±0.10	K0 ±0.05	P0 ±0.10	P2 ±0.10	P ±0.10	T ±0.05
252012	8.00	2.40	2.80	1.50	1.0	1.75	3.50	1.40	4.00	2.00	4.00	0.23

**Dimension of Reel : (Unit: mm)**

Type	A ±0.5	B ±0.5	C ±0.5	D ±1
All	178	60	12	1.5

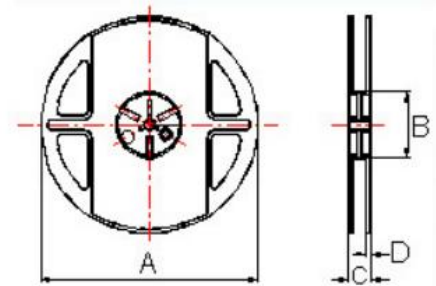

**Packaging Quantity**

P/N	Chip/Reel
HBE252012A-1R0M	3000

**※Storage Conditions**

1. Temperature and humidity conditions: -10-+40°C and 70% RH.
2. Recommended products should be used within 12 months form the time of delivery.
3. The packaging material should be kept where no chlorine or sulfur exists in the air.






**Recommended Soldering Conditions**

**For Lead-Free Application**

Figure . Re-flow Soldering

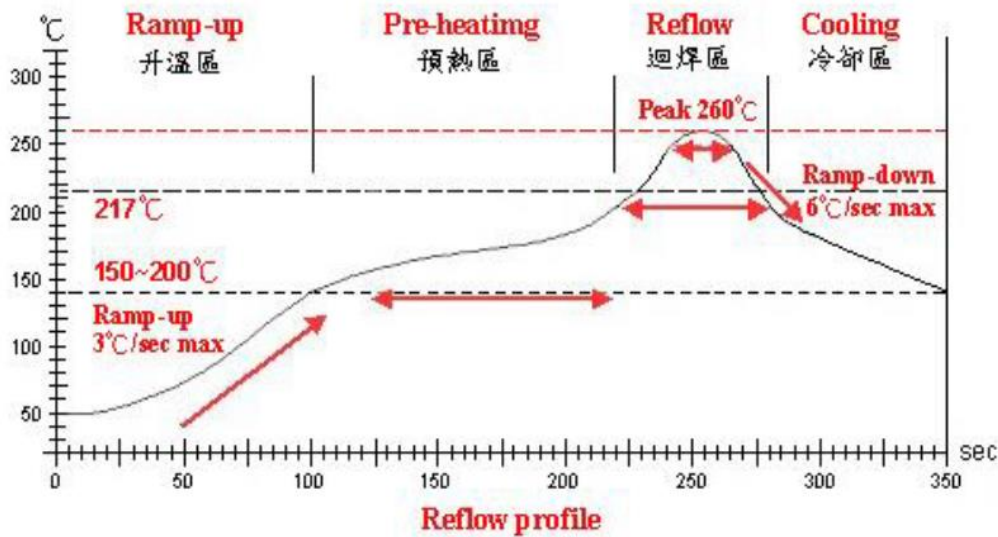

Lead-Free(LF) 標準溫度分析範圍

Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	预热區 Pre-heating	迴焊區 Reflow	Peak Temp	冷却區 Cooling
溫度範圍 Temp.scope	R.T. ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp. ~ 150°C
標準時間 Time spec.	—	60 ~ 180 sec	60 ~ 150sec	20 ~ 40 sec	—
實際時間 Time result	—	75 ~ 100 sec	90 ~ 120sec	20 ~ 35 sec	—

NOTE :

1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow





**XiangHua ELECTRONICS CORP.**



Total solution partner for EMI, Power and RF

# HBE Series Specification

## Reliability Of Wire Wound Power Inductors

### 1-1. Mechanical Performances (机械特性试验)

#### 1-1. Mechanical Performance

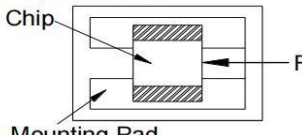No	Item	Specification	Test Method
1-1-1	Flexure Strength	The forces applied on the right conditions must not damage the terminal electrode and the metal body	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 30sec 
1-1-2	Vibration	Appearance: No damage (for microscope of CASTOR MZ-45 20X) Inductance change shall be within $\pm 20\%$	Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-3	Resistance to Soldering Heat	Appearance: No damage More than 75% of the terminal electrode should be covered with solder. Inductance: within $\pm 20\%$ of initial value	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 260 $\pm$ 5°C Immersion Time: 10 $\pm$ 1sec
1-1-4	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245 $\pm$ 5°C Immersion Time: 4 $\pm$ 1sec
1-1-5	Terminal Strength Test	No split termination  Chip Mounting Pad	Test device shall be soldered on the substrate, then apply a force in the direction of the arrow. Force : 5N Keeping Time: 10 $\pm$ 1sec

#### 1-2. Environmental Performance

No	Item	Specification	Test Method		
1-2-1	Temperature Cycle	Appearance: No damage Inductance: within $\pm 20\%$ of initial value	One cycle:		
			Step	Temperature (°C)	Time (min)
			1	-40 $\pm$ 3	30
			2	25 $\pm$ 2	3
			3	125 $\pm$ 3	30
4	25 $\pm$ 2	3			
			Total: 100cycles Measured after exposure in the room condition for 24hrs		
1-2-2	Humidity Resistance		Temperature: 60 $\pm$ 2°C Relative Humidity: 90 ~ 95% / Time: 500hrs Measured after exposure in the room condition for 24hrs		
1-2-3	High Temperature Resistance		Temperature: 85 $\pm$ 3°C Relative Humidity: 0% / Time: 500hrs Measured after exposure in the room condition for 24hrs		
1-2-4	Low Temperature Resistance		Temperature: -40 $\pm$ 3°C Relative Humidity: 0% / Time: 500hrs Measured after exposure in the room condition for 24hrs		

